


## Multimode Pump Laser Protector

<b>Features</b>	
Low Insertion Loss High Power High stability and reliability	
<b>Application</b>	
Fiber Laser	

### Specifications

Parameter	Values
Pass Wavelength Range (nm)	900~1000 or specify
Reflection Wavelength Range(nm)	1020~1120, 1500~1600 or specify
Insertion Loss (dB)	≤0.6
Isolation (dB)	≥25
PDL(dB)	≤0.10
Return loss (Input/output) (dB)	≥30/30
Max Power Handling (W)	10/20
Fiber Type	Multimode Fiber 105/125 (NA 0.15 or 0.22), 50/125, 62.5/125
Operating Temperature (°C)	-5 ~ +70
Storage Temperature (°C)	-40 ~ +85
Package(mm)	φ5.5x35

### Package Dimension

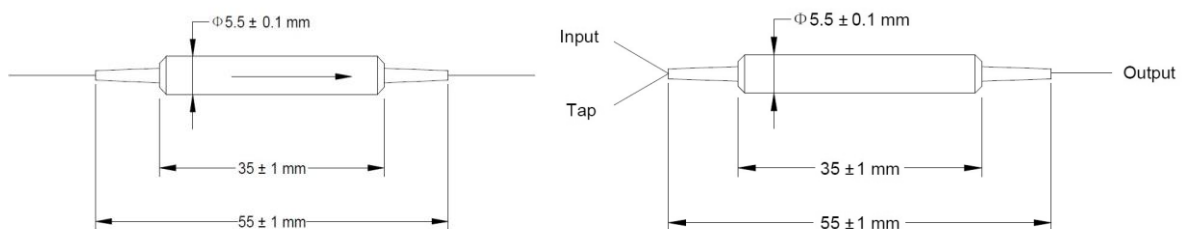

### Ordering Information

PLP	Wavelength	Port	Pigtail Type	Fiber Type	Length	Power
	980P/1060R 980P/1550R S=Specify	2=2 Port 3=3 Port	250=250um 900=900um	50/125 62.5/125 105/125 NA 0.15 105/125 NA 0.22 S=Specify	0.8= 0.8m	10=10W 20=20W