

## Polarization Maintaining Fiber Patchcord-2000nm

### Features

- Low Insertion Loss
- High Return Loss & High Repeatability


### Applications

- LAN, Data network
- CATV Network
- Telecommunication

### Specifications

Parameters	Unit	Values	
Operating Wavelength	nm	1950, 2000	
Connector Type	mm	UPC	APC
Typ. Insertion Loss	dB	0.3	0.4
Insertion Loss	dB	≤0.5	
Fiber Type		PM1550 Panda Fiber or Nufern PM 1950 Fiber	
Extinction Ratio	dB	≥23	
Return Loss	dB	≥50	≥60
Power Handling	mW	≤500	
Operating Temperature	°C	-40 ~ +85	

### Package Dimensions

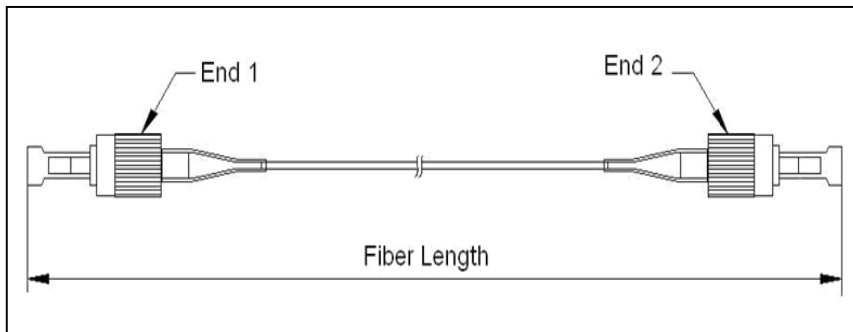

### Ordering Information

PMJP- ①①①①-②②-③③-④④④-⑤⑤⑤⑤⑤⑤-⑥

①	Wavelength	1950; 2000;
②	Connector (Input)	NE=None;FC=FC/UPC;SC=SC/UPC;FA=FC/APC;SA=SC/APC;LC=LC/UPC;xx=Others;
③	Connector (Output)	NE=None;FC=FC/UPC;SC=SC/UPC;FA=FC/APC;SA=SC/APC;LC=LC/UPC;xx=Others;
④	Pigtail Type	250=250um Fiber; 900=900um Loose Tube;
⑤	Fiber Type	PM1550; PM 1950;
⑥	Length	1=1m;