

1064, 1095nm Polarization Maintaining Isolator (PMIS)

Features

- Wide Operating Wavelength
- High Isolation & High PER
- Telcordia GR-1221 Compliant
- Available for Both Axes Pass or Fast Axis Block

Application

- PM Fiber Amplifier
- Transmitters & Fiber Laser
- Testing Equipment
- WDM & DWDM System
- Laser Cutting Machine




Specifications

Parameters	Unit	Single Stage	Dual Stage
Center Wavelength	nm	1064, 1095	
Peak isolation	dB	40	55
Min Isolation ($\lambda c \pm 5nm, 23^\circ C$ all sop)	dB	30	45
Typ. IL ($\lambda c \pm 5nm, 23^\circ C$ all sop)	dB	1.5	2.5
Insertion Loss ($\lambda c \pm 5nm, -5 \sim +65^\circ C$ all sop)	dB	1.8	3.4
PER	Both Axes Pass	dB	≥ 20
	Fast Axis Blocked	dB	≥ 22
Return Loss (Input / Output) (RL)	dB	$\geq 50/50$	$\geq 50/50$
Fiber Type		PM980, PM1060L	
Max Power Handling CW	mW	300	
Operating Temperature	$^\circ C$	$-0 \sim +50$	
Storage Temperature	$^\circ C$	$-40 \sim +85$	

Above data test at room temperature without connectors. With connectors, IL+0.3dB, RL-5dB, PER-2dB.



Default FC connector key width 2.02mm (narrow key), 2.12mm (wide key) available on request.

Typical Spectrum

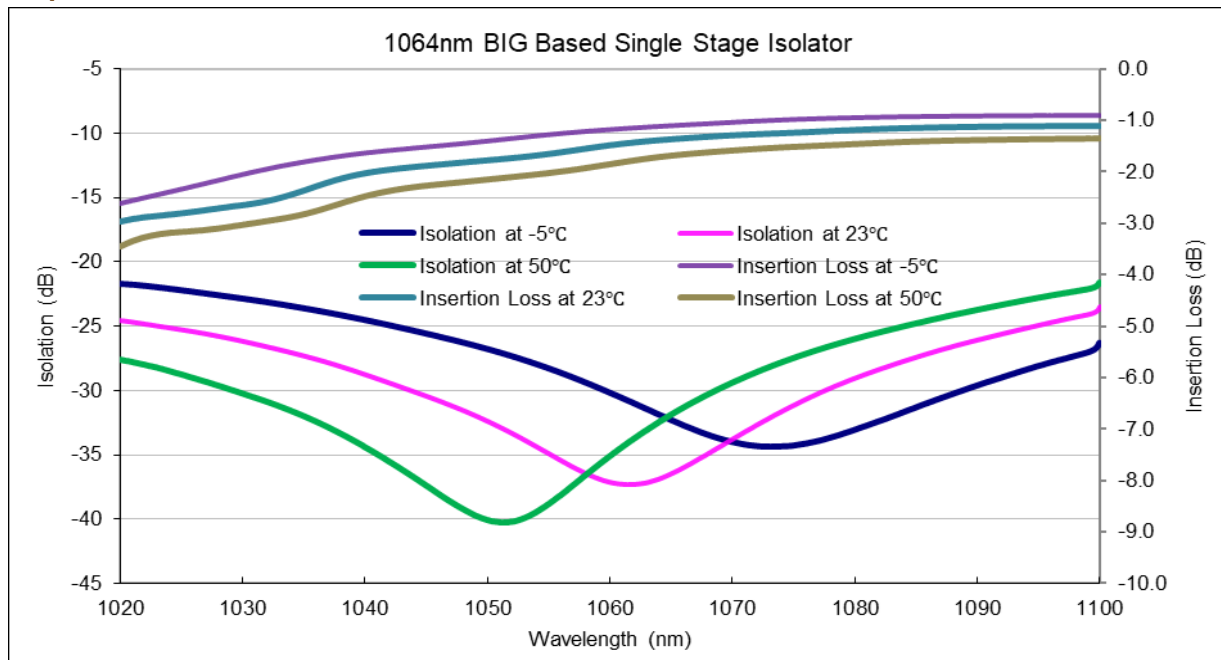

Package Information

Fiber Length	1m, others on request		
Pigtail Type	250 μm Bare Fiber	900 μm Loose Tube	2mm/3mm Loose Cable
Dimensions(mm)	$\phi 5.5 \times 35$	$\phi 5.5 \times 35, 90 \times 16 \times 9$	$\phi 5.5 \times 35$ (no boot), $90 \times 16 \times 9$
Approx Weight (g)	35	50	65

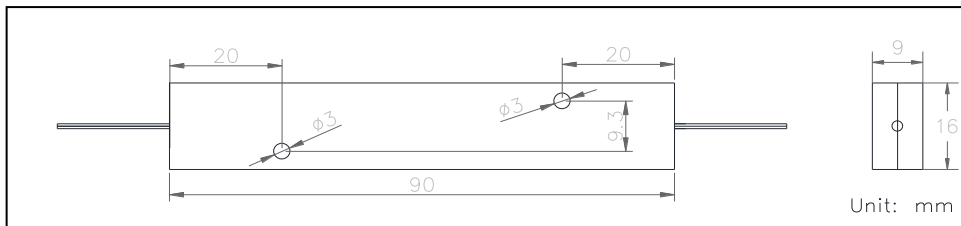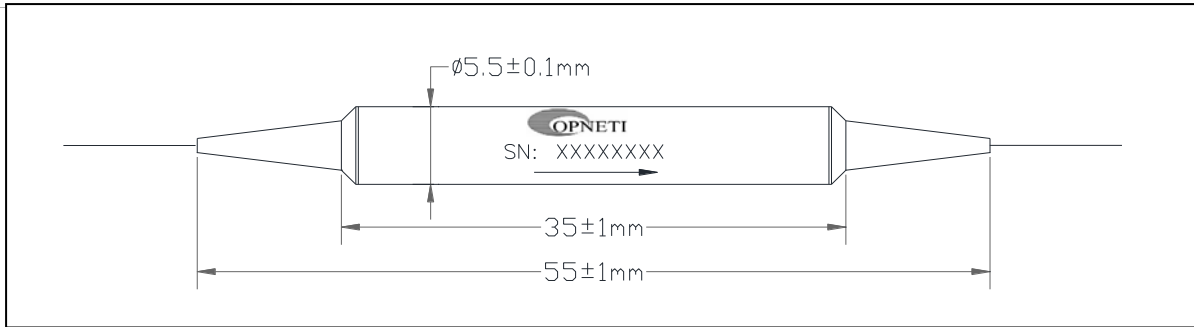

Ordering Information

PMIS- ①-②②②②②②②②②②②②③-④④④④-⑤⑤⑤⑤-⑥-⑦⑦

①	Type	S=Single Stage; D=Dual Stage;
②	Wavelength	1064, 1095;
③	Axis Alignment	F=Fast Axis Blocked; B=Both Axes Working;
④	Pigtail Type	250=250µm Fiber; 900=900µm Loose Tube; 2000=2mm Loose Cable; 3000=3mm Loose Cable;
⑤	Fiber Type	P98=PM980; P1L=PM1060L;
⑥	Fiber Length	1=1m; XX=other;
⑦	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; LC=LC/UPC; XX=Others;