

1300nm GFF / Notch Filter -GFF899652

Profile download

Features

Low Insertion Loss
Flat Spectral Gain
High Stability and Reliability

Applications

Laser Surgery
Gas Detector
Laser Cutting
Lan Network




Specifications

Parameters	Unit	Values
Wavelength Range C-band ^[1]	nm	1260~1350
Insertion Loss ^[2]	dB	≤0.6
Peak to Peak Error Function	dB	≤0.5
Polarization Dependent Loss for SM Fiber	dB	≤0.1
Polarization Extinction Ratio (PER) for PM Fiber	dB	≥23
Return Loss	dB	≥50
Power Handling CW	mW	500
Operating Temperature	℃	0 ~ +70
Storage Temperature	℃	-40 ~ +85
Fiber Type		SMF-28e, PM1300
Dimensions	mm	Φ5.5x34


^[1] GFF available in C / L band and 1 μ m/2 μ m range.

^[2] Insertion Loss +0.2dB, PER -2dB, Return Loss -5dB if add connector.

Package Dimensions

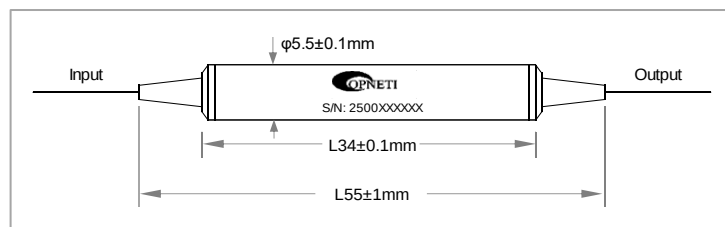

Sample Spectrum

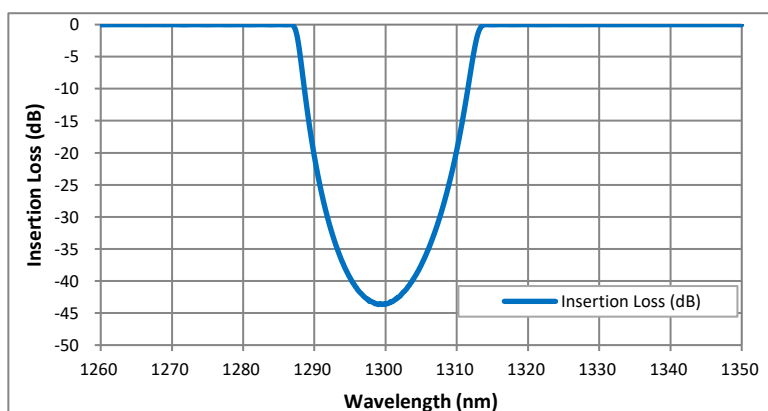

Ordering Information

GFF- ①①①-②②②②-③③③-④-⑤-⑥⑥-⑦⑦⑦⑦⑦⑦⑦⑦⑦⑦

①	Port	1x1;
②	Wavelength	1300;
③	Pigtail Type	250=250μm Bare Fiber; 900=900μm loose tube;
④	Fiber Type	1=SMF-28e; P13=PM1300;
⑤	Fiber Length	1=1m;
⑥	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; LC=LC/UPC; XX=Others;
⑦	Profile	GFF899652 ;