

# 1900nm GFF / Notch Filter -GFF9600080

[Profile download](#)

## Features

- Low Insertion Loss
- Flat Spectral Gain
- High Stability and Reliability

## Applications

- Laser Surgery
- Laser-Induced Fluorescence
- Laser Cutting and Marking
- Spectroscopic Analysis




## Specifications

Parameters	Unit	Values
Wavelength Range C-band <sup>[1]</sup>	nm	1800~2200
Insertion Loss <sup>[2]</sup>	dB	≤0.6
Peak to Peak Error Function	dB	≤0.5
Polarization Dependent Loss for SM Fiber	dB	≤0.1
Polarization Extinction Ratio (PER) for PM Fiber	dB	≥23
Return Loss	dB	≥50
Power Handling CW	mW	500
Operating Temperature	°C	0 ~ +70
Storage Temperature	°C	-40 ~ +85
Fiber Type		SMF-28e, SM950, PM1550, PM1950
Dimensions	mm	Φ5.5x34


<sup>[1]</sup> GFF available in C / L band and 1μm range.

<sup>[2]</sup> Insertion Loss +0.2dB, PER -2dB, Return Loss -5dB if add connector.

## Package Dimensions

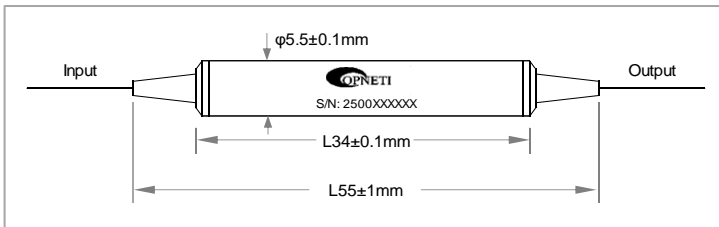

## Sample Spectrum

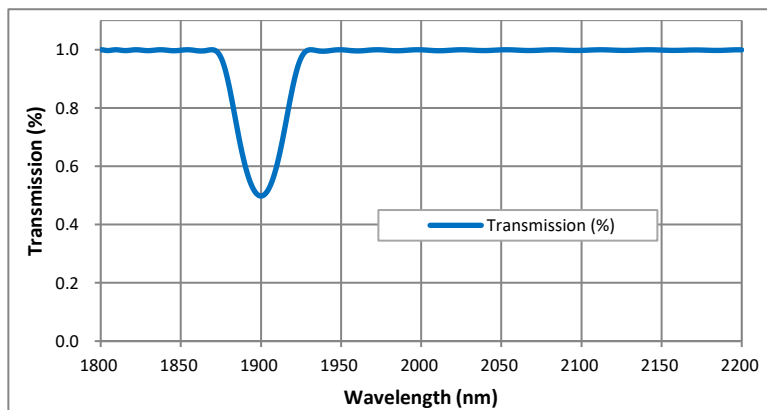

## Ordering Information

GFF- ①①①-②②②②②-③③③③③-④-⑤-⑥⑥⑥-⑦⑦⑦⑦⑦⑦⑦⑦⑦⑦⑦⑦⑦

①	Port	1x1;
②	Wavelength	1900;
③	Pigtail Type	250=250μm Bare Fiber; 900=900μm loose tube;
④	Fiber Type	1=SMF-28e; S9=SM1950; P15=PM1550; P19=PM1950;
⑤	Fiber Length	1=1m;
⑥	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; LC=LC/UPC; XX=Others;
⑦	Profile	<a href="#">GFF9600080</a> ;