

4x4 Single Mode Wide Band Coupler 1270-1650nm


Specifications

Parameters	Unit	4x4
Operating Wavelength	nm	1270~1650
Excess Loss	dB	≤0.6
Insertion Loss	dB	≤7.6
PDL	dB	≤0.2
Uniformity	dB	≤1.6
Return Loss	dB	≥55
Directivity	dB	≥55
Fiber Type		SMF-28e
Operating Temperature	°C	-5 ~ +70
Storage Temperature	°C	-40 ~ +85

\*with connectors, IL+0.3dB, RL-5dB.

Package Information

Configuration	4x4
Fiber Length	1m, others on request
Pigtail Type	250μm Bare Fiber; 900μm Loose Tube; 2mm/3mm Cable
Dimensions(mm)	100x80x10

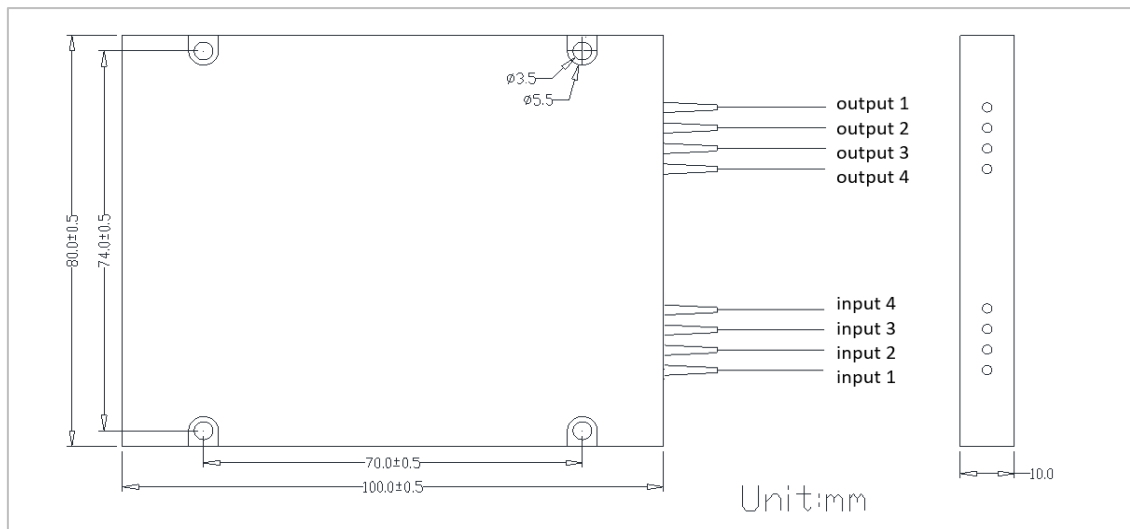

Ordering Information

CP- ①①-②③③③-④④④④④④④④④-⑤⑤⑤⑤⑤-⑥⑥⑥⑥-⑦-⑧-⑨⑨-⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩⑩

①	Type	TW=Wide Band Coupler Module;
②	Grade	P=P Grade;
③	Port Type	4x4;
④	Wavelength	1270~1650;
⑤	Coupling Ratio	EVEN;
⑥	Pigtail Type	250=250μm Fiber; 900=900μm Loose Tube; 2000=2mm Cable; 3000=3mm Cable;
⑦	Fiber Type	1=SMF-28e;
⑧	Length	1=1m; X=Other;
⑨	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; LC=LC/UPC; XX=Others;
⑩	Package	100x80x10;