

Band Pass Filter - 1839nm, 10nm

Features

Low Insertion Loss
Wide Stop Band
High Isolation
High Stability and Reliability

Applications

Medical Cosmetology
Laser Surgery
Laser Engraving
Gas Sensing




Specifications

Parameters	Unit	Values
Operation Wavelength Range	nm	1200~2300
Center Wavelength	nm	1839
Passband Width (at 1dB)	nm	10
1dB Pass Wavelength Range	nm	1833.3~1843.3
3dB Pass Wavelength Range	nm	1831.3~1846
Pass Wavelength Range tolerance	nm	10±0.5
Stop Wavelength Range	nm	1200~1818.7 and 1859.3~2300
Pass Insertion Loss	dB	≤0.9
Stop Band Isolation	dB	≥30
PDL	dB	≤0.2
Return Loss (SMF/MMF)	dB	≥50/30
Max Power Handling (CW)	mW	500
Fiber Type		MMF50/125, SMF-28e, SM1950
Operating Temperature	°C	-0 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimensions	mm	φ5.5×L34



* For devices with connectors, IL+0.3dB, RL-5dB,

* Power handling can be higher on request.

Package Dimensions

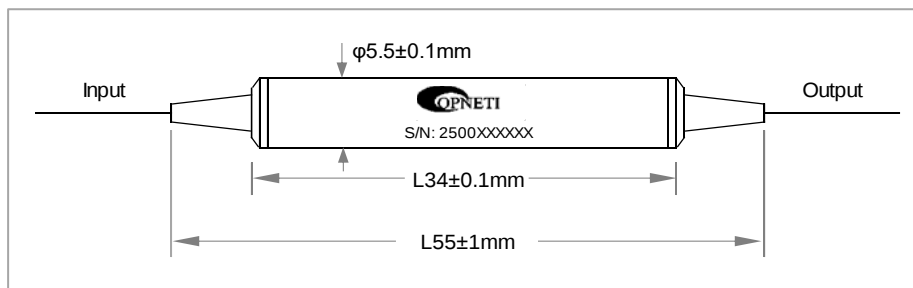

Typical Spectrum

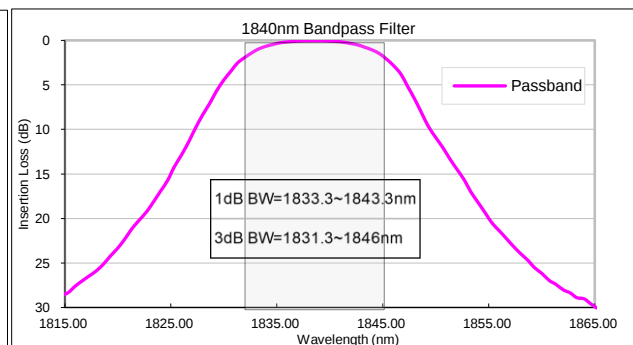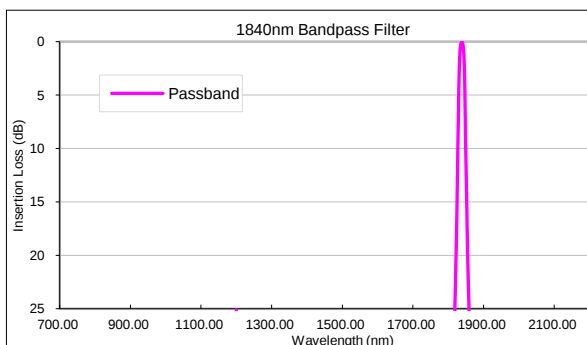

Ordering Information

BPF- ①①①-②②②②-③③-④④④-⑤⑤-⑥-⑦⑦

①	Port Type	1x1;
②	Pass Wavelength	1839;
③	Pass Band Width	10=10nm;
④	Pigtail Type	250=250μm Fiber; 900=900μm Loose Tube;
⑤	Fiber Type	O2=MMF50/125; 1=SMF-28e; S9=SM1950;
⑥	Length	1=1m;
⑦	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; LC=LC/UPC; XX=Others;