

## Band Pass Filter - 811nm, 16nm

### Features

- Low Insertion Loss
- Wide Stop Band
- High Isolation
- High Stability and Reliability

### Applications

- Photonics and Sensing
- Phototherapy and Laser Surgery
- Optical Fiber Amplifiers
- Laser Cutting / Welding / Marking




### Specifications

Parameters	Unit	Values
Operation Wavelength Range	nm	350~1100
Center Wavelength	nm	811
Passband Width (at 1dB)	nm	16
1dB Pass Wavelength Range	nm	803~819
3dB Pass Wavelength Range	nm	802~821
Pass Wavelength Range tolerance	nm	16±0.5
Stop Wavelength Range	nm	350~791 and 832~1100
Pass Insertion Loss	dB	≤0.9
Stop Band Isolation	dB	≥30
PDL	dB	≤0.2
Return Loss (SMF/MMF)	dB	≥50/30
Max Power Handling (CW)	mW	500
Fiber Type		MMF50/125, SMF-28e
Operating Temperature	°C	-0 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimensions	mm	φ5.5×L34



\* For devices with connectors, IL+0.3dB, RL-5dB,

\* Power handling can be higher on request.

### Package Dimensions

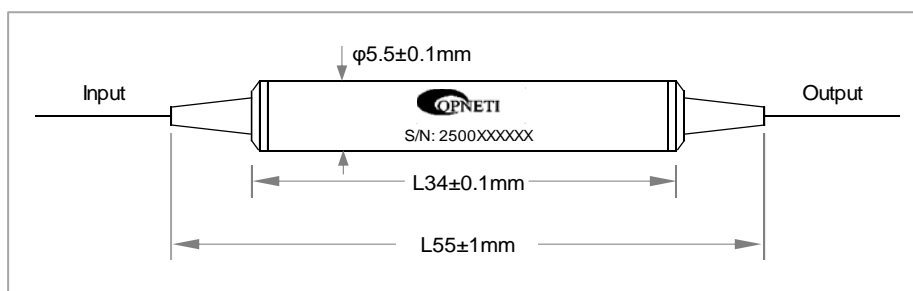

### Typical Spectrum

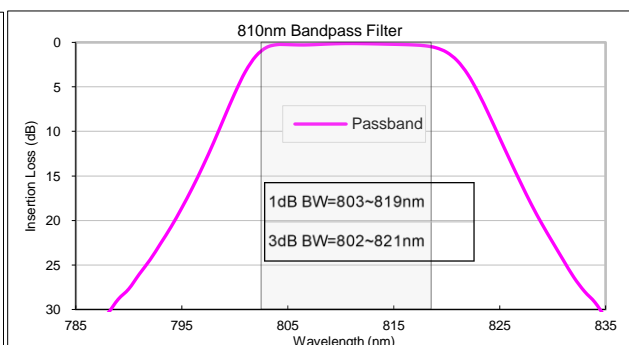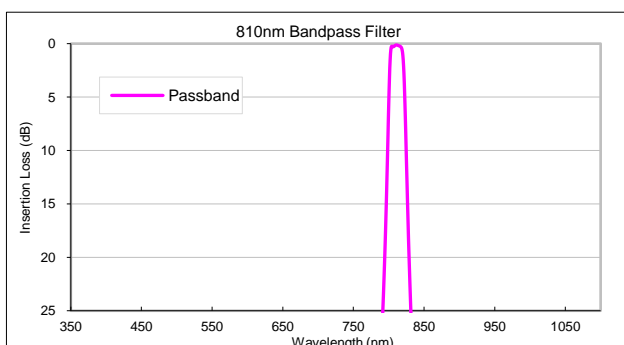

**Ordering Information**

**BPF- ①①①-②②②-③③-④④④-⑤⑤-⑥-⑦⑦**

①	Port Type	1x1;
②	Pass Wavelength	811;
③	Pass Band Width	16=16nm;
④	Pigtail Type	250=250μm Fiber; 900=900μm Loose Tube;
⑤	Fiber Type	O2=MMF50/125; 1=SMF-28e;
⑥	Length	1=1m;
⑦	Connector	NE=None; FA=FC/APC; FC=FC/UPC; SA=SC/APC; SC=SC/UPC; LC=LC/UPC; XX=Others;